Triacs BT137 series

GENERAL DESCRIPTION

Glass passivated triacs in a plastic envelope, intended for use in applications requiring high bidirectional transient and blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting, heating and static switching.


QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	MAX.	UNIT
	BT137- BT137- BT137-	500 500F 500G	600 600F 600G	800 800F 800G	
V_{DRM}	Repetitive peak off-state	500	600	800	V
I _{T(RMS)} I _{TSM}	voltages RMS on-state current Non-repetitive peak on-state current	8 65	8 65	8 65	A A


PINNING - TO220AB

PIN	DESCRIPTION			
1	main terminal 1			
2	main terminal 2			
3	gate			
tab	main terminal 2			

PIN CONFIGURATION



SYMBOL



LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.		MAX.		UNIT
V_{DRM}	Repetitive peak off-state voltages		-	-500 500 ¹	-600 600 ¹	-800 800	\ \
I _{T(RMS)}	RMS on-state current Non-repetitive peak on-state current	full sine wave; $T_{mb} \le 102 ^{\circ}\text{C}$ full sine wave; $T_{j} = 25 ^{\circ}\text{C}$ prior to surge	-		8		А
		t = 20 ms	-		65 71		A
l²t dl _⊤ /dt	I ² t for fusing Repetitive rate of rise of on-state current after	t = 16.7 ms t = 10 ms $I_{TM} = 12 \text{ A}; I_G = 0.2 \text{ A};$ $dI_G/dt = 0.2 \text{ A}/\mu\text{s}$	-		71 21		A A ² s
	triggering	T2+ G+ T2+ G- T2- G- T2- G+	- - -		50 50 50 10		A/μs A/μs A/μs A/μs
I _{GM} V _{GM} P _{GM}	Peak gate current Peak gate voltage Peak gate power		- - -		2 5 5		V W
P _{G(AV)} T _{stg} T _j	Average gate power Storage temperature Operating junction temperature	over any 20 ms period	-40 -		0.5 150 125		ους

October 1997 1 Rev 1.200

¹ Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 6 A/µs.

Triacs BT137 series

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
R _{th j-mb}	Thermal resistance junction to mounting base Thermal resistance junction to ambient	full cycle half cycle in free air		- - 60	2.0 2.4 -	K/W K/W K/W

STATIC CHARACTERISTICS

T_i = 25 °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.			UNIT
	Gate trigger current	BT137- $V_D = 12 \text{ V}; I_T = 0.1 \text{ A}$				F	G	
I _{GT}	Gate ingger current	T2+ G+	-	5	35	25	50	mĄ
		T2+ G- <u>T</u> 2- G-	-	8 11	35 35	25 25	50 50	mA mA
	Latching current	$V_D = 12 \text{ V}; I_{GT} = 0.1 \text{ A}$	-	30	70	70	100	mA
		T2+ G+ T2+ G-	- -	7 16	30 45	30 45	45 60	mA mA
		T2- G- T2- G+	-	5 7	30 45	30 45	45 60	mA mA
I _H	Holding current	$V_D = 12 \text{ V}; I_{GT} = 0.1 \text{ A}$	-	5	20	20	40	mA
V_{T}	On-state voltage Gate trigger voltage	$I_T = 10 \text{ A}$ $V_D = 12 \text{ V}; I_T = 0.1 \text{ A}$ $V_D = 400 \text{ V}; I_T = 0.1 \text{ A};$	- - 0.25	1.3 0.7 0.4		1.65 1.5 -		V V V
I _D	Off-state leakage current	$T_{j} = 125 \text{ °C}$ $V_{D} = V_{DRM(max)};$ $T_{j} = 125 \text{ °C}$	-	0.1		0.5		mA

DYNAMIC CHARACTERISTICS

 $T_j = 25$ °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS		MIN.		TYP.	MAX.	UNIT
dV _D /dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)};$ $T_i = 125 °C;$ exponential	 100	F 50	G 200	250	-	V/μs
dV _{com} /dt	Critical rate of change of commutating voltage	waveform; gate open circuit $V_{DM} = 400 \text{ V}; T_j = 95 ^{\circ}\text{C};$ $I_{T(RMS)} = 8 \text{ A};$ $dI_{com}/dt = 3.6 \text{ A/ms};$ gate	-	-	10	20	-	V/μs
t _{gt}	Gate controlled turn-on time	open circuit $I_{TM} = 12 \text{ A}; V_D = V_{DRM(max)}; I_G = 0.1 \text{ A}; dI_G/dt = 5 \text{ A}/\mu s$	-	-	-	2	-	μs

Philips Semiconductors Product specification

BT137 series Triacs




Fig.1. Maximum on-state dissipation, P_{tot} , versus rms on-state current, $I_{T(RMS)}$, where $\alpha = conduction$ angle.




Fig.4. Maximum permissible rms current $I_{T(RMS)}$, versus mounting base temperature T_{mb} .




Fig.2. Maximum permissible non-repetitive peak on-state current I_{TSM} , versus pulse width t_p , for sinusoidal currents, $t_n \le 20$ ms.




Fig.5. Maximum permissible repetitive rms on-state current $I_{T(RMS)}$, versus surge duration, for sinusoidal currents, f = 50 Hz; $T_{mb} \le 102$ °C.






Fig.3. Maximum permissible non-repetitive peak on-state current I_{TSM} , versus number of cycles, for sinusoidal currents, f = 50 Hz.





 $V_{GT}(T_i)/V_{GT}(25^{\circ}C)$, versus junction temperature T_i .


Philips Semiconductors Product specification


Triacs BT137 series

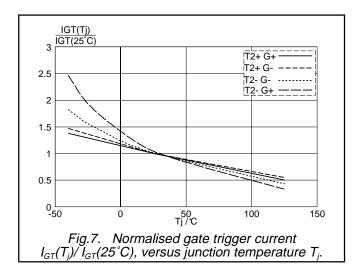

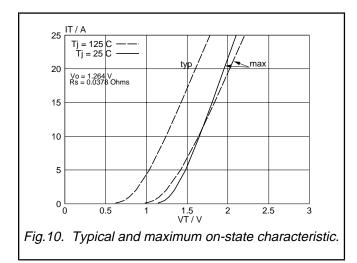



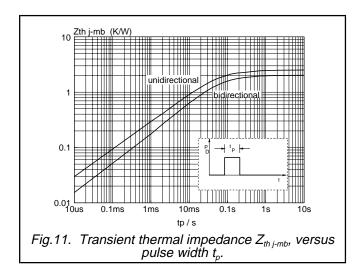







Fig.9. Normalised holding current $I_H(T_i)/I_H(25^{\circ}C)$, versus junction temperature T_j .

Fig.12. Typical commutation dV/dt versus junction temperature, parameter commutation dI_{7}/dt . The triac should commutate when the dV/dt is below the value on the appropriate curve for pre-commutation dI_{7}/dt .

Triacs BT137 series

MECHANICAL DATA

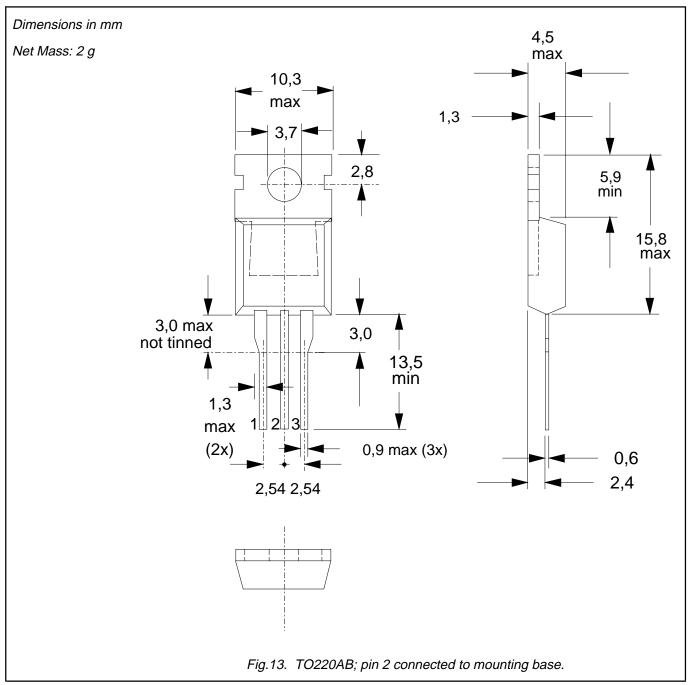

- Notes
 1. Refer to mounting instructions for TO220 envelopes.
 2. Epoxy meets UL94 V0 at 1/8".

Philips Semiconductors Product specification

Triacs BT137 series

DEFINITIONS

Data sheet status						
This data sheet contains target or goal specifications for product development.						
This data sheet contains preliminary data; supplementary data may be published later.						
This data sheet contains final product specifications.						
İ						

Limiting values

Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Where application information is given, it is advisory and does not form part of the specification.

© Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.